

LVXXW24CG

Constant Voltage Driver

Model: LV30W24CG2
LV60W24CG2



Model	Rated Input Voltage	Input Power	Input Current	PF	Output Power Range	Output Voltage	Output Current	Efficiency (typ.)
LV30W24CG2	220-240VAC	≤38W	≤0.19A	≥0.95	0-30W	24V	0-1.25A	86%
LV60W24CG2		≤72W	≤0.35A		0-60W		0-2.5A	87%

* Test result @230V, 50Hz, Full Load.

1. Parameters

category	Item	Technical Norm			
Features	Output Type	Constant Voltage			
	Dimmable Type	Non-dimmable			
	Output Features	Isolation SELV			
	IP Grade	IP20			
	Insulation Class	Class II			
Input	Rated Input Voltage	220-240VAC			
	Range of AC Input Voltage	176-264VAC			
	Range of DC Input Voltage	175-280VDC(EMI not evaluated)			
	Frequency	Rate:50/60Hz, Range:47~63Hz			
	Power Factor	≥0.95, 220-240VAC, Rated Load, see graphs			
	THD	≤10%	230VAC, Rated Load, see graphs		
	Standby Power Consumption	≤0.5W, @230VAC,NO Load			
	Inrush Current	Model	Ipeak	Ipeak(typ.)	Duration time
	30W	<30A	22A	310us	
	60W	<30A	26A	220us	

LVXXW24CG

Output	Output Voltage	24VDC+5%			
	No load Voltage	24VDC+5%			
	Output Voltage Ripple	30W	<240mV _{PK-PK} (0.5%)		
		60W	<240mV _{PK-PK} (0.5%)		
	Line Regulation	±1%			
	Load Regulation	±2%			
	Overshoot	<105%Vo			
	Start-up Time	≤0.5S (220-240VAC)			
	Hold-up time & Turn off time (Typical)	Model	Hold-up time(mS)	Turn-off time(mS)	230VAC, LED Rated Load, Hold-up time measure from AC input turn-off to output voltage drop to 90%, turn-off time measure from AC input turn-off to output voltage drop to 10%
		30W	30	72.3	
60W		22.8	62.8		
Efficiency	30W	≥85%	86% typ.	230VAC, Rated Load, at output terminals, see graphs	
	60W	≥86%	87% typ.		
Protection	Short Circuit Protection	Auto Recovery			
	Over Current Protection	120%-180%Io, Auto Recovery			
	Over Voltage Protection	110%-150%Vo, Auto Recovery			
	Insulation voltage	I/P to O/P,3KV _{ac} /5mA/1min			
	Insulation resistance	>100M ohm @ 500VDC			
	Leakage current	I/P to O/P < 250μA			
Environment	Ta/Operation Temperature	-25....+45°C			
	Ts/Storage Temperature	-40....+85°C			
	Tc/Enclosure Temperature For Safety	30W	80°C		
		60W	90°C		
	Humidity	5% 85%RH			
Atmosphere	86-108KPa				
Construction	Connection Method	Terminal			
	Cable Terminals	Input	1 terminal block		
		Output	30W/60W	1 terminal block	
	Installation	Independent			
	Input Wire Cross Section	0.75mm ² -1.5 mm ²			
	Output Wire Cross Section	30W	0.5mm ² -1.5 mm ²		
60W		0.75mm ² -1.5 mm ²			

	Output Cable Length	Max. 3M		
	Cable diameters range	Input	2.2-4mm or 9.5-10.5mm	
		Output & Dimming	2.2-4mm	
	Dimension	30W/60W	300*30*16mm (L*W*H)	
Standards	Certification	CE, ENEC, SAA		
	Safety Standards	EN61347-2-13:2014/A1:2017, EN62384:2006/A1:2009, EN61347-1:2015, AS61347.2.13:2018, AS/NZS 61347.1:2016 Inc A1		
	EMC Standards	EN IEC 55015:2019, EN IEC 55015:2019/A11:2019 EN IEC 61000-3-2:2019, EN61547:2009, EN 61000-3-3:2013/A1:2019		
	Performance	EN62384		
	Surge	L-N:2KV		
Others	RoHS	2011/65/EU		
	MTBF	≥250KHours, Ta=25°C (MIL-HDBK-217F)		
	Audible Noise	<24dB @ 10cm distance, 20dB background		
	Life Time	30W	≥80K Hrs	@230VAC , full load, see graphs. End of Life: Failure Rate<10%.
		60W	≥65K Hrs	
	Warranty	5years		

Remark:

All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature.

LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.

Output ripple should be measured at the output end which has with 0.1uF/50V ceramic capacitance and 47uF/50V Aluminum capacitance connected in parallel. Measured using oscilloscope with bandwidth limited to 20MHz.

2. Connected quantities of different current Breaker

TYPE	LV30W24CG2 Connected quantities of different current Breaker						Input Voltage	Inrush Current <25A	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm²	2.5mm²	2.5mm²	4mm²	4mm²			
TYPE B	27	35	44	55	68	@230VAC	22	310us	
TYPE C	44	57	70	87	109				
TYPE D	70	91	112	140	175				

TYPE	LV60W24CG2 Connected quantities of different current Breaker						Input Voltage	Inrush Current <30A	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm²	2.5mm²	2.5mm²	4mm²	4mm²			
TYPE B	23	30	37	46	58	@230VAC	26	220us	
TYPE C	37	48	59	74	92				
TYPE D	59	77	95	118	148				


3. Label

INPUT <input type="checkbox"/> L <input type="checkbox"/> N wire preparation (6mm) INPUT:0.75-1.5 ^{sq} OUTPUT:0.5-1.5 ^{sq}	KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheld	LED Driver LV30W24CG2 Constant Voltage Type For LED modules only	INPUT:220-240V~ 50/60Hz 0.19A •tc OUTPUT:24V ==Max.1250mA Rated Power:Max.30W Power Factor(λ):≥0.95 ta:-25...45°C tc:80°C		INPUT <input type="checkbox"/> OUTPUT <input type="checkbox"/>


INPUT <input type="checkbox"/> L <input type="checkbox"/> N wire preparation (6mm) INPUT:0.75-1.5 ^{sq} OUTPUT:0.75-1.5 ^{sq}	KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheld	LED Driver LV60W24CG2 Constant Voltage Type For LED modules only	INPUT:220-240V~ 50/60Hz 0.35A •tc OUTPUT:24V ==Max.2500mA Rated Power:Max.60W Power Factor(λ):≥0.95 ta:-25...45°C tc:90°C		INPUT <input type="checkbox"/> OUTPUT <input type="checkbox"/>

4. Graph


PF VS LOAD Curve

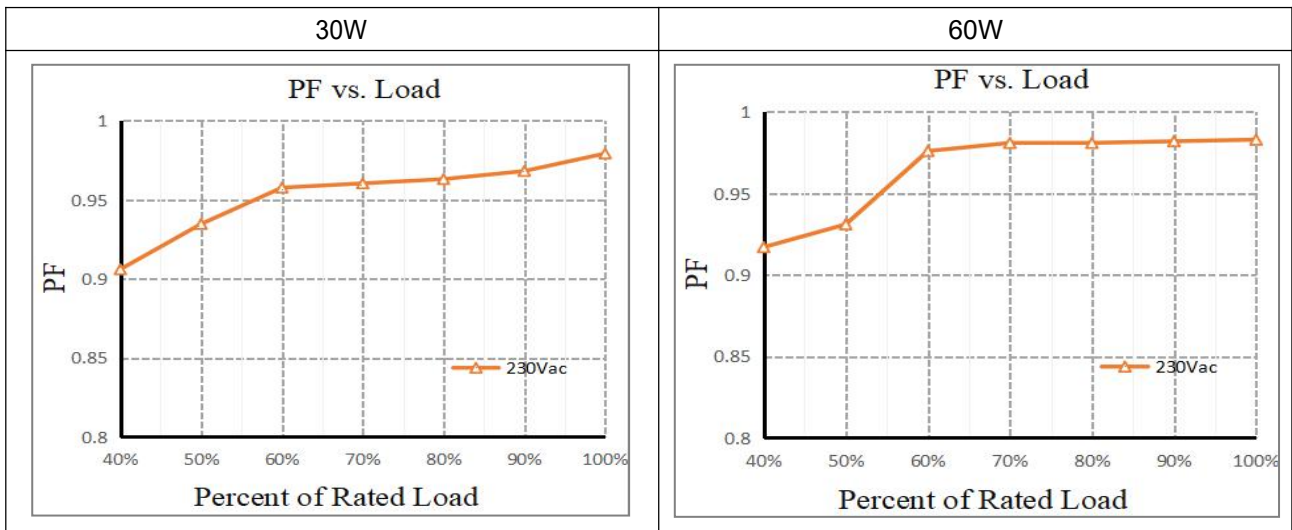

THD VS LOAD Curve

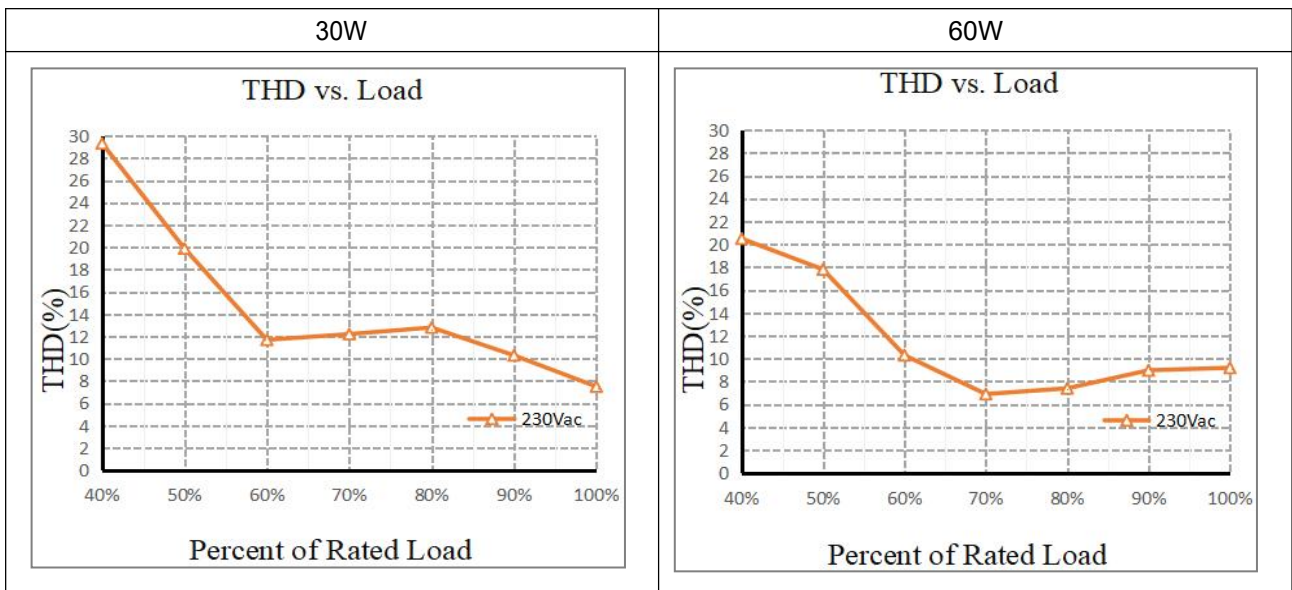


Efficiency VS LOAD Curve

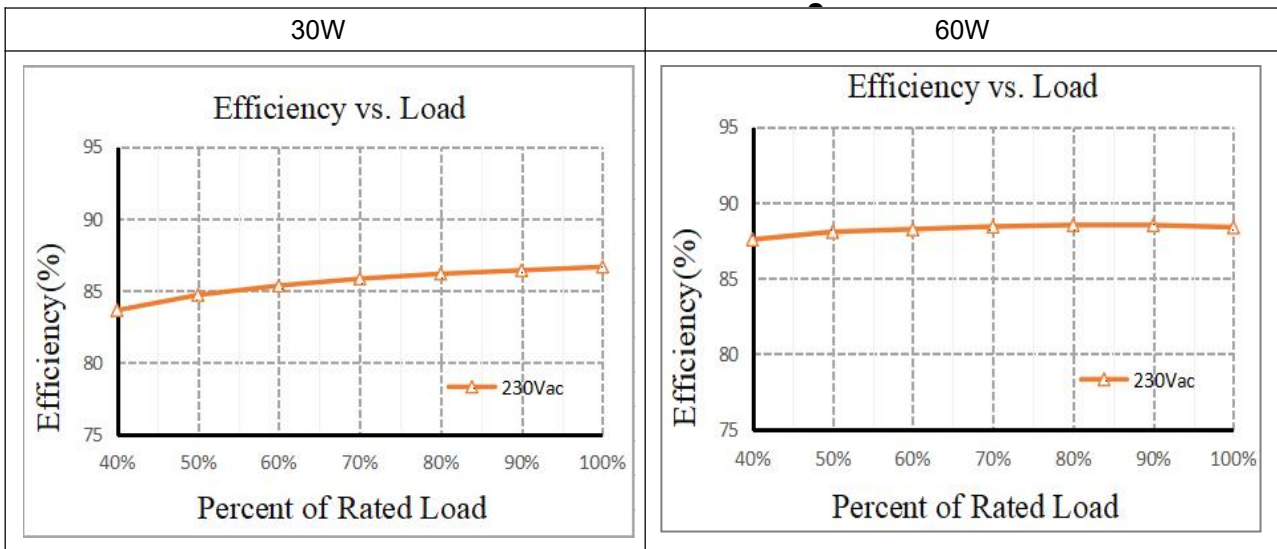

5. Dimension (Unit: mm)

LV30W24CG2 & LV60W24CG2:

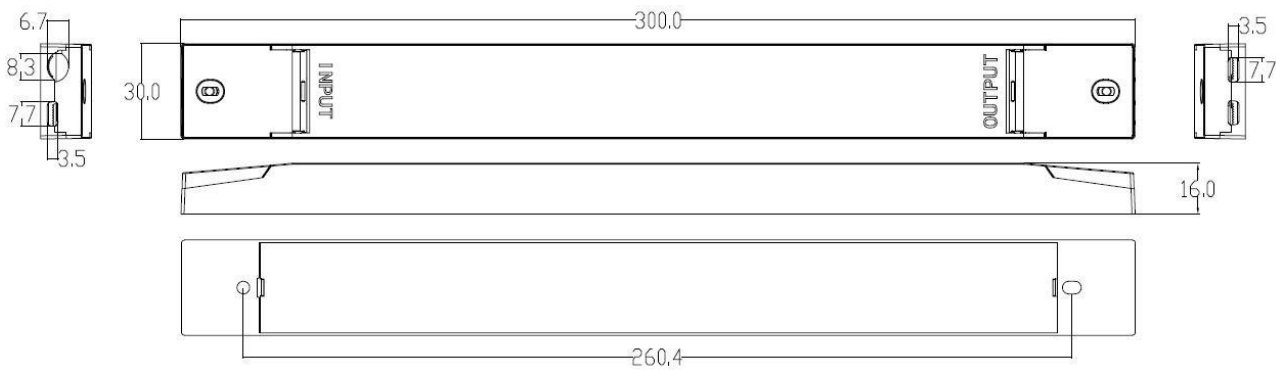

6. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)

7. REVISION HISTORY

DATE	REV	REMARK
2023-03-30	V1.0	Initial release.
2024-01-15	V1.1	Update labels and high-definition images.